SECOND FLOOR AREA ANALYSIS :

S.NO.	DESCRIPTION OF ITEMS		L	B	AREA IN SQ.MT.
1.	ROOM-1	BCR	9.07	8.27	75.00
2.	ROOM-2	GCR	9.07	8.27	75.00
3.	ROOM-3	LAB-7	9.91/8.27	8.27	75.17
4.	ROOM-4	PREPRATION ROOM	3.16	3.18	10.04
5.	ROOM-5	LAB-8	9.90/8.27	8.27	75.13
6.	ROOM-6	FIRST AID	3.76	2.84	10.67
7.	ROOM-7	STATIONARY	3.76	2.73	10.26
8.	ROOM-8	HOUSE KEEPING	3.76	2.73	10.26
9.	ROOM-9	LAB-9	10.06/8.47	8.27	76.62
10.	ROOM-10	PREPRATION ROOM	3.16	3.176	10.00
11.	ROOM-11	LAB-10	9.94/8.35	8.27	75.83
12.	ROOM-12	LAB-11	8.17	10.08/8.45	75.69
13.	ROOM-13	PREPRATION ROOM	3.15	3.176	10.00
14.	ROOM-14	LAB-12	8.17	10.01/8.37	75.08
15.		HE TOILET	8.17	2.32	18.95
14.		SHE TOILET	8.56	2.40	20.54
15.	ROOM-15	PREPRATION ROOM	1.73	5.79	10.01
16.	ROOM-16	LAB-13	8.17	9.18	75.00
17.	ROOM-17	CLASS ROOM	8.17	9.18	75.00
18.	ROOM-18	CLASS ROOM	8.17	9.18	75.00
19.	ROOM-19	CLASS ROOM	8.17	9.18	75.00
20.	ROOM-20	CLASS ROOM	8.29	9.68/8.64	75.93
21.	ROOM-21	CIR	8.30 avg.	11.48 avg.	80.01
	CIRCULATION+STAIRS ETC.				325.10
	TOTAL CARPET AREA				1495.09
	WALLS,COLUMNS ETC.				198.01
	TOTAL COVERED AREA				1693.10

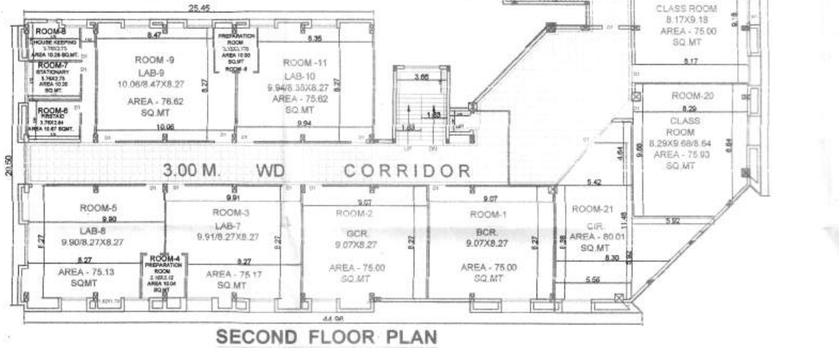

SECOND FLOOR PLAN

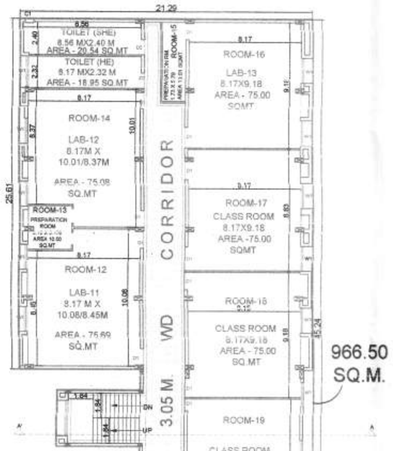

966.50 SQ.M.





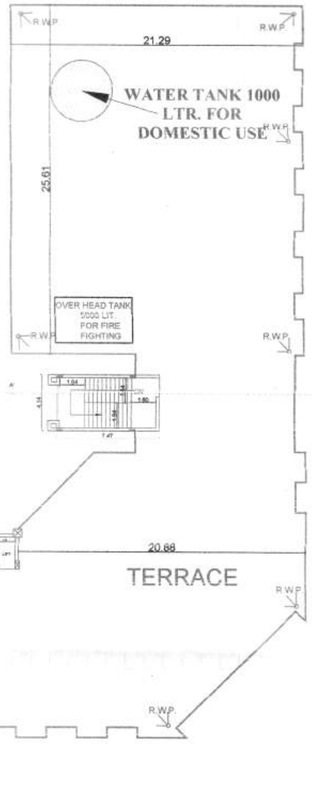

TERRACE PLAN
(SCALE 1:100)

GROUND FLOOR AREA ANALYSIS :

S.NO.	DESCRIPTION OF ITEMS		L	B	AREA IN SQ.MT.
1.	ROOM-1	PRINCIPAL	4.88	6.29	30.69
2.	ROOM-2	RECORD ROOM	3.26	1.75	5.70
3.		TOILET	1.91	1.76	3.40
4.	ROOM-3	CLASS ROOM	9.21	8.15	75.06
5.	ROOM-4	ROOM	6.34	8.15	51.67
5.	ROOM-5	COMPUTER CENTER	9.21	8.15	75.06
7.	ROOM-6	LIBRARY	20.00	8.15	163.00
8.		HE TOILET	2.59	8.15	21.10
9.		SHE TOILET	2.17	8.15	17.68
10.	ROOM-7	MACHINE ROOM-1	8.17	10.01	81.78
11.	ROOM-8	MACHINE ROOM-2	8.17	10.06	82.35
12	ROOM-9	TUTORIAL ROOM	8.17	4.83	39.46
13.	ROOM-10	BOARD ROOM	8.15	4.83	39.36
14.	ROOM-11	OFFICE ALL INCLUSIVE	8.17	20.13	164.46
15	ROOM-12	HOD CABINS	3.71	5.40	20.03
16.	ROOM-13	HOD CABINS	3.71	5.40	20.03
17.	ROOM-14	FACULTY OFFICE	4.46	10.59	48.56
18.		PANTRY-1	8.29	1.50	12.43
19.	ROOM-16	CAFETERIA	9.85	15.28	150.50
20.		GEN./MAINTENANCE	4.76	2.50	11.90
21.		FEMALE TOILET	4.67	3.20	15.56
22.		MALE TOILET	4.67	3.20	15.56
23.	ROOM-17	ANIMAL HOUSE	9.73	9.20	89.51
24.		TOILETS FOR DISABLED (HE)	2.55	1.61	4.10
25.		TOILETS FOR DISABLED (SHE)	2.55	1.61	4.10
26.		GUARD ROOM	2.22	4.508	10.00
27.		WAITING AREA	16.53	10.31	170.42
	CIRCULATION+STAIRS ETC.				365.6
	TOTAL CARPET AREA				1786.33
	WALLS,COLUMN ETC.				191.90
	TOTAL COVERED AREA				1980.30 SQ.M

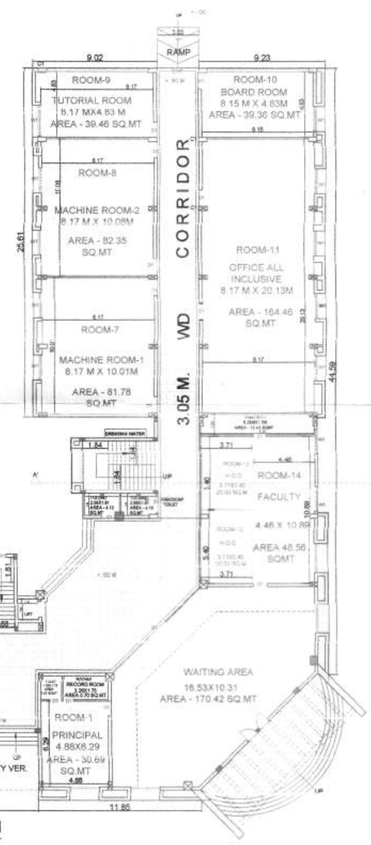

GROUND FLOOR PLAN

FIRST FLOOR AREA ANALYSIS :

S.NO.	DESCRIPTION OF ITEMS		L	B	AREA IN SQ.MT.
1.	ROOM-1	PLACEMENT	4.88	8.15	39.77
2.	ROOM-2	CENTRAL STORE	6.65	5.12	34.04
3.	ROOM-3	CENTRAL STORE	4.96	8.15	40.42
4.	ROOM-4	LAB-1	9.91/8.27	8.27	75.17
5.	ROOM-5	PREPARATION ROOM	3.15	3.18	10.01
6.	ROOM-6	LAB-2	9.90/8.27	8.27	75.13
7.	ROOM-7	TUTORAIL ROOM	4.88	8.15	39.77
8.	ROOM-8	LAB-3	10.06/8.47	8.27	76.62
9.	ROOM-9	PREPARATION ROOM	3.15	3.176	10.00
10.	ROOM-10	LAB-4	9.94/8.35	8.27	75.82
11.	ROOM-11	LAB-5	8.17	10.08/8.45	75.89
12.	ROOM-12	PREPARATION ROOM	3.15	3.176	10.00
13.	ROOM-13	LAB-6	8.17	10.01/8.37	75.08
14.		TOILET (HE)	8.17	2.32	18.95
15.		TOILET (SHE)	8.56	2.40	20.54
16.	ROOM-14	CLASS ROOM	8.17	9.18	75.00
17.	ROOM-15	FACULTY ROOM	8.17	7.87	64.29
18.	ROOM-16	SEMINAR HALL	8.17	16.16	132.02
19. 20.	ROOM-17	EXAMINATIONS CONTROL OFFICE	8.17	4.14	33.82
	CIRCULATION+STAIRS ETC.				334.30
	TOTAL CARPET AREA				1316.24
	WALLS, COLUMNS ETC.				198.01
	DOUBLE HEIGHT & BALCONY				149.45
	TOTAL COVERED AREA				1663.70

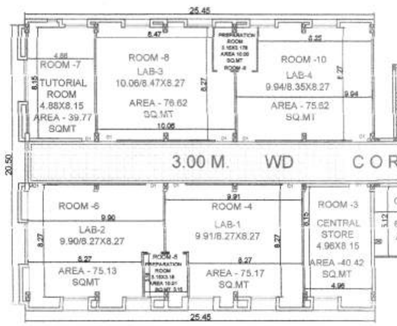

FIRST FLOOR PLAN

LEGEND

SYMBOLS	DESCRIPTION
	4.5 KG CO2 FIRE EXTINGUISHER
	6KG WATER TYPE EXTINGUISHER
	FIRE HOSE REEL

LEGEND

EXISTING AREA SHOWN AS
PROPOSED AREA SHOWN AS
COMPOUNDING AREA SHOWN AS
TREES SHOWN AS

SPECIFICATIONS:

1. 150MM. THICK P.C.C. IN FOUNDATION (1:4:8) (CEMENT, COARSE SAND AND AGGREGATES).
2. BRICK WORK IN 1:6 (CEMENT AND SANDS MORTAR).
3. R.C.C. IN COLUMN, BEAM CHAJJAS ETC. IN 1:2:4 (CEMENT,SAND AND AGGREGATE).
4. 12 MM. THICK CEMENT PLASTER 1:6 ON WALLS.
5. PUCCA CEMENT CONC. OR MOSAIC FLOORS.

AREA STATEMENT

S.NO.	DETAILS OF PARTICULARS	AREA
1.	AREA KHET NO. 97	= 6890.00 SQ.M.
2.	AREA KHET NO. 98 MINJUMLA	= 1300.00 SQ.M.
3.	AREA KHET NO. 98 MINJUMLA	=922.22 SQ.M.
4.	AREA KHET NO. 99/2	=2180.00 SQ.M.
TOTAL LAND AREA		= 11,292.22 SQ.M. = 2.78 ACRE = 1.129 HECTARE
ALLOWABLE F.A.R. (2.0)		= 22,584.44 SQM.
ACHIEVED F.A.R.		= 0.472 (5337.00)
GROUND COVERAGE @ 35 % (ALLOWABLE)		= 3952.28 SQM.
GROUND COVERAGE @17.53 % (ACHIEVED)		= 1980.20 SQM.
COVD. AREA GROUND FLOOR INCLUDING(ANIMAL HOUSE = 98.40 SQ.M.) (CAFETERIA & GEN. MAINTENANCE = 211.10 SQ.M.)		= 1980.20 SQM.
COVD. AREA FIRST FLOOR		= 1663.70 SQM.
COVD. AREA SECOND FLOOR		= 1693.10 SQM.
TOTAL BUILT UP AREA		= 5337.00 SQM.

BUILDING PLAN OF PROPOSED "ACME INSTITUTE OF PHARMACY" SITUATED AT KH. NO. 97,98 MINJUMLA , & 99/2 VILL. MEGI NAGLA P.O. RAJAU , TEHSIL FARIDPUR, DIST. BAREILLY (ON N.H.-24 BAREILLY LUCKNOW HIGHWAY) THROUGH- SHRI HARI KRISHAN EDUCATIONAL SOCIETY - BAREILLY (U.P.)

PRESIDENT-
MR. NARENDRA SINGH BEDI
"SHRI HARI KRISHAN EDUCATIONAL SOCIETY" DIST. BAREILLY (U.P.)

NORTH

D/W SCHEDULE

D/W1 = 1.20 X 2.1	W = 2.00 X 1.80
D = 1.50 X 2.1	W1 = 1.80 X 1.80
D1 = 1.00 X 2.1	W2 = 1.50 X 1.80
D2 = 0.90 X 2.1	V = 0.60 X 0.60
D3 = 0.60 X 2.1	
D4 = 0.75 X 2.1	

For Shri Hari Krishan Educational Society
SIGN. OF OWNERS
President
(1)

ARCHITECT
ANIL KUMAR SAXENA
CA-7315/82
ANILARCHITECTS & ENGG.
B-340, RAJENDRA NAGAR
BAREILLY. M. 9897858839
anilarchitects2008@gmail.com

Govt. Approved Valuer
CAT-I (2016-17)
Bank Panel in Many Bareilly Br.